


# 3/8" Elima-Matic Bolted Plastic

with Non-Metallic Center Sections

**E8**

## Performance

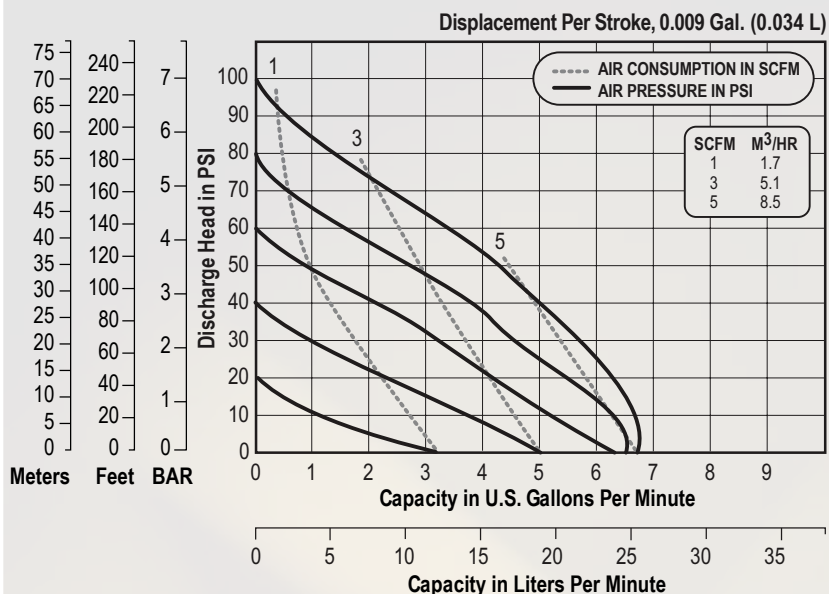

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-6.8 gpm (25.7 lpm)

### Port Size

Suction . . . . . 3/8" NPT (BSP)

Discharge . . . . . 3/8" NPT (BSP)

Air Inlet . . . . . 1/4" NPT

Air Exhaust . . . . . 1/4" NPT

### Suction Lift

Dry . . . . . 8' (2.44 m)

### Max Solid Size (Diameter)

. . . . . 0.10" (2.25 mm)

**Max Noise Level** . . . . . 78 dB(A)

### Shipping Weights

Polypropylene . . . . . 3 lbs (1.40 kg)

Kynar . . . . . 4.5 lbs. (2.04 kg)

## Dimensions

